


# AD 750

Doosan  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' \$z' D:

	"	kw	"	kw	Amp
400/230	750,00	600,00	680,00	544,00	982,00

fP GDE

GC, ) &

,) & z

fDF DE

%\$1

% %&

GC" \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D; A Ž 5J F

## TRANSFER SWITCH

# AD 750

Doosan  
Mecc Alte  
D+' &'

Manufacturer	Doosan		
Model	DP222LB		
		664,00 kw [890,00HP]	
	L	21,927	
	"	128 x 142	
		15,0:1	
	"# "	1500	
	L	40,00	
	L	134,80	
AbsorbedAirDischargeReSourceKey.Text	' # "	42,20	
	' # "	860,00	
	' # "	101,00	
	° C	481,00	
		24 V d.c.	
	Load	%\$i	+) i
	# "	147,10	109,20
			73,00


	Mecc Alte		
	ECO 40-2L/4		
	Hz	50	
	"	680,00	
7cg'		0,80	
		3	
	fl Ł	400/230	
	A	982,00	

		fl Ł		fl Ł	
	"	"	"	"	L
AD 750	4190,00	3494,00	1550,00	2301,00	1000,00
		fl Ł		fl Ł	
	"	"	"	"	L
MS 85	5400	5297	1606	2656	1000

# AD 750

Doosan  
Mecc Alte  
D+' &'

## 1 D+' &'

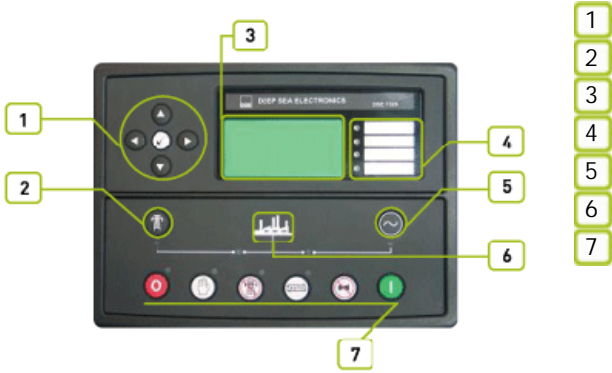

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ ž fI  
&&\$ ž  
8G9+' &\$ ž  
8G9+' &\$ ž  
% &1 \* ( ž  
žFG' &žFG(,) ž

# AD 750

Doosan  
Mecc Alte  
D+ &

f@z@Bl  
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B\*\*\$-\$)

6G'9B\*\*%\$\$\$!\*!&

6G'9B\*\*%\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&\*(

&(\$)


ž

ž

ž

# AD 750

Doosan  
Mecc Alte  
D+ &

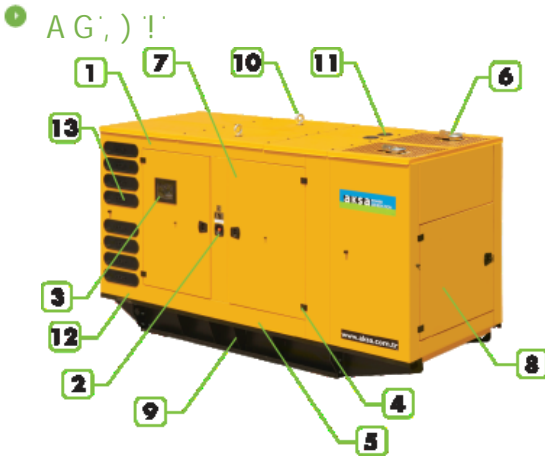

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000